



Stainless Steel Process Tank



- Capacity:** 1,500 Gallons/5678 Liters with 20% Head Space
- Power:** SEW-Eurodrive 3 HP Gearmotor, Single or Three Phase
- Agitation:** Standard Blade Bottom Agitation
- Heating:** Min. 2,250,000 BTU Hot Water or Steam Boiler is Required
- Jacket:** Dimple Plate, Bottom & (2) Side Zones, Max. 70 PSI, Max. 50 GPM
- Ports:** (2) 1.5" TC Ports or (2) Thermowells for the Product and Indicating Thermometer, (2) 1.5" TC CIP Sprayballs Ports, (1) TC Inlet Port, and (2) Lifting Lugs
- Lid:** Flat Top with Center Bridge or Manway Cover
- Bottom:** Slight Pitch Toward Outlet
- Insulation:** Polyurethane
- Walls:** 304 Stainless Steel, No. 4 Finish (316 SS Available)
- Legs:** (4) Stainless Legs with Adjustable Ball Feet
- Outlet:** 2" Leak Detect Valve Ready
- Dimensions:** TBD

1,500 GALLON PROCESS TANK LIST PRICE

\$ 45,500.00

Add-On Features :


316 Stainless Steel Interior-Extra Corrosion Protection for Product Contact Surface Area	\$	4,500.00
Cone or Dish Bottom Tank Design - no additional charge	\$	-
Side and Bottom Scrape Agitation	\$	4,000.00
Full Sweep Agitation	\$	3,000.00



Full Sweep Agitation



Full Scrape Agitation

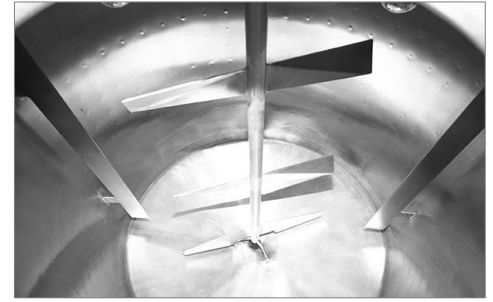

Bottom, Middle & Top Blade Agitation